


Tying the *Buckland Destroyer*

Materials

- TMC 2302 # 12 hook
- Brown thread
- 2.8mm Tungsten Bead - Copper
- *Crystal Flash* – Hot Orange
- *MFC Centipede Legs* - Speckled Orange – Mini
- *UTC Ultra Wire* – Med – Copper
- *UTC Ultra Wire* – Med – Black
- Goose Biots – Brown
- Pheasant Tail Fibers
- *Spirit River Diamond Brite* – Dark Olive

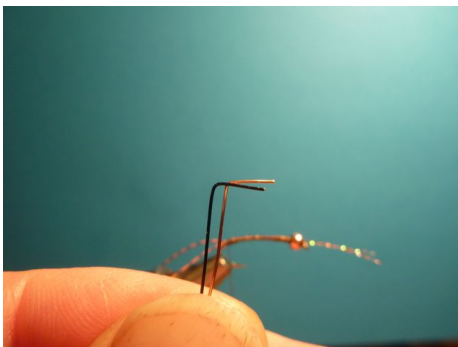

Method

- Thread on a 2.8mm Tungsten bead.
- Lay down a base of brown thread.
- Tie in 2 strands of small barred orange rubber centipede legs.
- Poke 2 strands of hot orange crystalflash through the bead from behind and tie in.
- Bend black & copper UTC wires 4mm from the end at a right angle
- Tie in both wires at the rear, dub a small ball of orange dubbing behind wire and then wind thread to position shown.
- Wind both wires forward together with tightly touching wraps and tie off.



- Tie in 2 brown goose biots as shown



- Fold back biots, tie off and trim.



- Tie in pheasant tail fibers for wing casing, then tie in one strand of small barred orange rubber *centipede legs* on each side as shown.



- Dub a body of *Diamond Brite*, fold pheasant tail over body to form wing casing and tie off, taking care not to tie over front legs.
- Whip finish and apply head cement.
- GO CATCH A BIG FISH!

*Cheers
Darren*